



ELASTECH products inc.

5915 Atlantic Dr., Unit 2, Mississauga, Ontario, Canada L4W 1S4
phone (416) 670-2521 fax (416) 670-2599

09 662
09 730



POLYURETHANE PRODUCTS

Champ-Floor

TRACK & FIELD

Your Partner
For Sport & Play

Existing Wood, Concrete, or Asphalt Sub-base



Specification Sheet #CF-WCA


Champ-Floor Polyurethane
lacquer finish

Champ-Floor FPU

Existing base to be smooth and
level. Base may be wood, concrete
or asphalt.

vapour barrier

Granular base

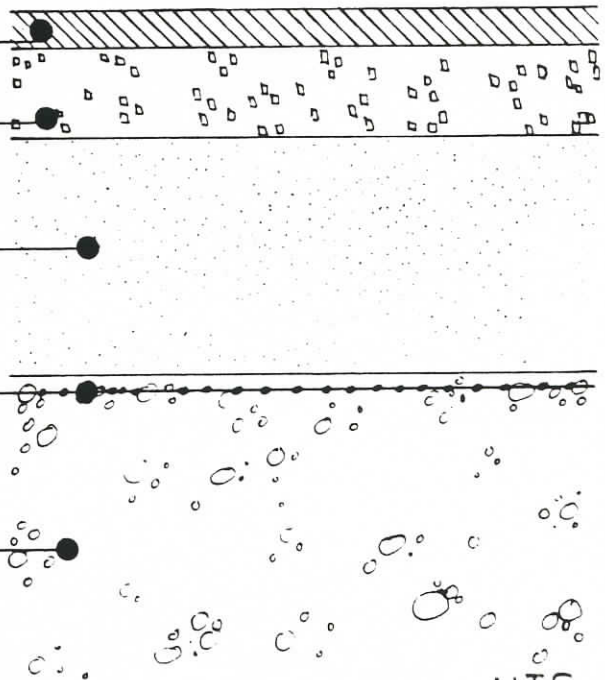

NTS

Note: It is important that the base - wood, concrete or asphalt - is cleaned to its original condition. The surface must be smooth and have a moisture content of less than 5%. Minor deviations in the level of the surface can be filled with the Champ-Floor material. Major deviations must be filled with the same material as the base.

© 1989 rmz Elastech Products Inc.

a completely integrated system

1. The base can be wood, concrete or asphalt. Any other surfaces must be tested for adhesion and primers.
2. The sub-base must be clean, smooth and dry. Surface preparation can include sand-blasting or grinding to remove any surface treatment.
3. For concrete, a special primer supplied by Sportbau Canada is applied to the clean surface.
4. The Champ-Floor FPU surface is applied to the desired thickness.
5. The Champ-Floor FPU is sanded to achieve a smooth surface.
6. The coloured wear lacquer is placed over the Champ-Floor FPU.
7. Line marking is applied with a two-component polyurethane paint.

CAUTION: The wear lacquer contains flammable solvents. All precautions of no sparks, open flames or smoking are to be strictly adhered to during and 10 hours after application.